



How to install Coolaroo shade sail

Selecting The Position

Before you commence installation it is very important that you consider the most suitable location for your shade sail(s) taking into account the following:

- Size of the shade sail(s);
- Strength of existing structures intended to be anchor points;
- Ability to insert fixing posts;
- Location of barbecues;
- Sun direction etc.
- There could also be other factors, specific to your situation, which require consideration.


Determining The Correct Fixing Points

Once you have identified the location for your shade sail(s) it is important to determine the most suitable fixing points for the corners. Some of these fixing points could already exist e.g. pergola/sundeck, large tree, fence post or fascia.

This stage of the installation is critical. You should ensure all fixing points are structurally sound and if unsure, obtain independent advice from a builder or engineer.

Building Approvals

Prior to installation, check with local authorities for any relevant building regulations which may exist.

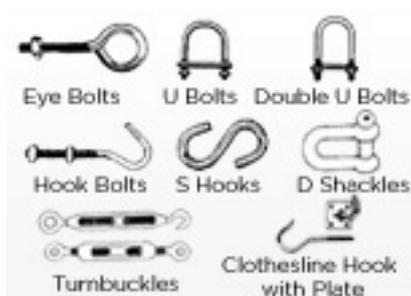

Selecting Fixing Accessories


There is an extensive range of fixing accessories available to help you secure your shade sail(s). These accessories are readily available from your normal hardware supplier. Rope/chain - to extend your shade sail to a fixing point if required. Select the fixing accessories which best suit your own installation.



Use with metal Fascias

Attaching To Fascia

If you intend to fix your shade sail to a fascia the use of a Fascia Support is strongly recommended. The Fascia support is used to connect the overhangs of rafters or trusses to fascias ledgers giving a strong connection between the two and improved strength.

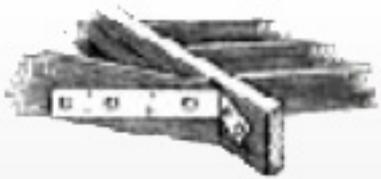


Use with timber Fascias

Post Supports


If additional posts are required, the use of treated softwood (H5 level treatment) is recommended. Hardwood of durability Class 1 can also be used. Your local timber supplier can assist you in selection. Post lengths should be calculated taking into account the proposed height of your sail plus the depth of your footings.

Steel posts are also suitable and are available from either your normal hardware outlet/home centre or your local steel supplier. Steel posts can be cut to predetermined lengths and painted to a colour matching your shade sail and the environment.

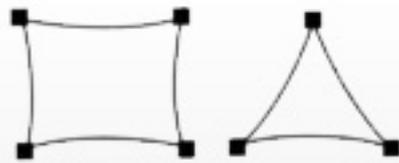


Footings

Measure out centres of footing positions and mark as illustrated. Dig holes 400 mm (16") sq. & 800mm (32") deep.

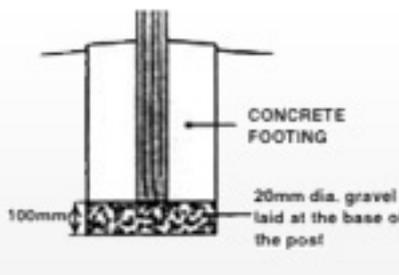

Firm Ground

Lay a 100mm (4") depth of 20mm (3/4") dia gravel at the base of the post.

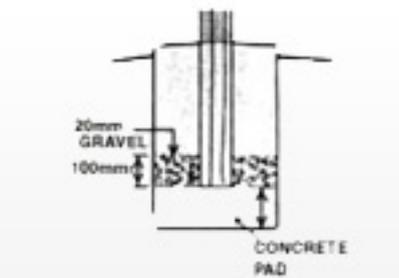

Soft Ground

Pour a 100mm (4") depth of concrete at the bottom of the hole to provide a solid pad. Insert the posts and, with string lines, ensure they are in plumb alignment. Temporarily brace the posts.

Concreting

Mix concrete in line with manufacturer's instructions. These will be labelled clearly on the packet. Your supplier will be able to give you any special advice you may require for your own conditions. Pour concrete to the top of the holes ensuring it is packed well. Ensure the concrete surface is sloping away from the posts to assist water drainage. Allow poles to set in concrete for a minimum of 48 hours. Brace if required.

Installation

Connect fixing accessories to mounting points as required. Ensure all connections face towards the middle of the sail and are tightly secured. Check again to ensure all mounting points are solid. Lay your shade sail out and commence the installation.

Tensioning

Using the selected fixing accessories, commence connecting the corners of the shade sail to the fixing points.

Connect all points, using a ratchet tensioning tool if necessary to gain increased leverage. Stop tensioning when the shade sail is rigid with little or no creases. **CAUTION:** Do not over tension. Re-tension periodically if required.

Warning

Your Coolaroo shade sail is designed to provide UV protection and comfort in domestic areas. When selecting the position for your shade sail, ensure all fixing points are structurally sound and fixings are tightly secured. Inspect regularly. Prior to installing, consult your local council regarding building regulations which may apply in your area. Exposure to certain chemicals e.g, Chlorine can lead to the premature breakdown of the fabric. Chemicals to be used on or around the fabric should be referred to Coolaroo prior to their use.

DO NOT have fire or an open flame close to the fabric. Do not use your barbecue under the shade structure.

Care Instructions

Your shade sail(s) may be cleaned at any time using a solution of mild detergent and water. Apply the solution with a sponge or a very soft brush. Let the solution stand on the fabric for 10 minutes and rinse thoroughly with water from your garden hose.

DO NOT put the fabric in your washing machine, clothes drier, or scrub it with a stiff brush, scouring pad, or an abrasive cleaner.